

Twin Skid Compact

Turn-key solution.


Fastest connection with two HEMK.

Compact design reducing space requirements.

Installation cost reduction.



Twin Skid Compact




REFERENCES		MVT05730H100	MVT05730H080	MVT05730H050	MVT05730H040
RATINGS	Rated power @ 40 °C	5730 kVA			
	Operating Grid Frequency	50 Hz			
MEDIUM VOLTAGE EQUIPMENT	MV rated voltage	20 kV	22 kV	30 kV	33 kV
	LV rated voltage	600 V			
	Transformer cooling	ONAN (KNAN optional)			
	Transformer vector group	Dy11y11			
	Transformer protection	Protection relay for pressure, temperature (two levels) and gassing / dielectric level PT100			
	Transformer index of protection	IP54			
	Transformer losses	IEC standard (IEC Tier-2 optional)			
	Oil retention tank (Optional)	Galvanized steel. Integrated with hydrocarbon filter.			
	Switchgear configuration ^[3]	Double feeder (2L)			
	Switchgear protection ^[3]	Circuit breaker (V)			
	Switchgear short circuit rating ^[1]	16 kA / 1 s (optionally: 20 kA / 1 s, 20 kA / 3 s or 25 kA / 1 s)			
	Switchgear IAC ^[1]	A-FLR 16 kA / 1 s (optionally 20 kA or 25 kA)			
	Rated impulse withstand voltage	125 kV		170 kV	
CONNECTIONS	MV connections	Close-coupled plug & play solution			
	MV AC wiring	MV bridge between transformer and protection switchgear prewired			
ENVIRONMENT	Ambient temperature range ^[2]	From -25 °C to +60 °C, >40 °C power derating			
	Maximum altitude (above sea level) ^[1]	Up to 1000 m (optionally up to 4000 m)			
	Relative humidity	4% to 95%			
AUXILIARY SERVICES	User Cabinet (Optional)	LV cabinet in the skid			
	UPS System (Optional) ^[4]	3 kVA / 3 kW			
OTHER EQUIPMENT	Safety mechanism (Optional)	Interlocking system			
	Fire suppression system (Optional)	Accessory for transformer oil retention tank			
STANDARDS	Compliance	IEC 62271-212, IEC 62271-200, IEC 60076, IEC 61439-1			

NOTES

- [1] Consult with Power Electronics for other options.
 [2] For lower temperatures, consult with Power Electronics.
 [3] SF6 free optional available.
 [4] Consult with Power Electronics for UPS autonomy.

Twin Skid Compact




REFERENCES		MVT06300H100	MVT06300H080	MVT06300H050	MVT06300H040
RATINGS	Rated power @ 40 °C	6300 kVA			
	Operating Grid Frequency	50 Hz			
MEDIUM VOLTAGE EQUIPMENT	MV rated voltage	20 kV	22 kV	30 kV	33 kV
	LV rated voltage	660 V			
	Transformer cooling	ONAN (KNAN optional)			
	Transformer vector group	Dy11y11			
	Transformer protection	Protection relay for pressure, temperature (two levels) and gassing / dielectric level PT100			
	Transformer index of protection	IP54			
	Transformer losses	IEC standard (IEC Tier-2 optional)			
	Oil retention tank (Optional)	Galvanized steel. Integrated with hydrocarbon filter.			
	Switchgear configuration ^[3]	Double feeder (2L)			
	Switchgear protection ^[3]	Circuit breaker (V)			
	Switchgear short circuit rating ^[1]	16 kA / 1 s (optionally: 20 kA / 1 s, 20 kA / 3 s or 25 kA / 1 s)			
	Switchgear IAC ^[1]	A-FLR 16 kA / 1 s (optionally 20 kA or 25 kA)			
	Rated impulse withstand voltage	125 kV		170 kV	
CONNECTIONS	MV connections	Close-coupled plug & play solution			
	MV AC wiring	MV bridge between transformer and protection switchgear prewired			
ENVIRONMENT	Ambient temperature range ^[2]	From -25 °C to +60 °C, >40 °C power derating			
	Maximum altitude (above sea level) ^[1]	Up to 1000 m (optionally up to 4000 m)			
	Relative humidity	4% to 95%			
AUXILIARY SERVICES	User Cabinet (Optional)	LV cabinet in the skid			
	UPS System (Optional) ^[4]	3 kVA / 3 kW			
OTHER EQUIPMENT	Safety mechanism (Optional)	Interlocking system			
	Fire suppression system (Optional)	Accessory for transformer oil retention tank			
STANDARDS	Compliance	IEC 62271-212, IEC 62271-200, IEC 60076, IEC 61439-1			

NOTES

- [1] Consult with Power Electronics for other options.
 [2] For lower temperatures, consult with Power Electronics.
 [3] SF6 free optional available.
 [4] Consult with Power Electronics for UPS autonomy.

Twin Skid Compact




REFERENCES		MVT08400H100	MVT08400H080	MVT08400H050	MVT08400H040
RATINGS	Rated power @ 40 °C	8400 kVA			
	Operating Grid Frequency	50 Hz			
MEDIUM VOLTAGE EQUIPMENT	MV rated voltage	20 kV	22 kV	30 kV	33 kV
	LV rated voltage	660 V			
	Transformer cooling	ONAN (KNAN optional)			
	Transformer vector group	Dy11y11			
	Transformer protection	Protection relay for pressure, temperature (two levels) and gassing / dielectric level PT100			
	Transformer index of protection	IP54			
	Transformer losses	IEC standard (IEC Tier-2 optional)			
	Oil retention tank (Optional)	Galvanized steel. Integrated with hydrocarbon filter.			
	Switchgear configuration ^[3]	Double feeder (2L)			
	Switchgear protection ^[3]	Circuit breaker (V)			
	Switchgear short circuit rating ^[1]	16 kA / 1 s (optionally: 20 kA / 1 s, 20 kA / 3 s or 25 kA / 1 s)			
	Switchgear IAC ^[1]	A-FLR 16 kA / 1 s (optionally 20 kA or 25 kA)			
	Rated impulse withstand voltage	125 kV		170 kV	
CONNECTIONS	MV connections	Close-coupled plug & play solution			
	MV AC wiring	MV bridge between transformer and protection switchgear prewired			
ENVIRONMENT	Ambient temperature range ^[2]	From -25 °C to +60 °C, >40 °C power derating			
	Maximum altitude (above sea level) ^[1]	Up to 1000 m (optionally up to 4000 m)			
	Relative humidity	4% to 95%			
AUXILIARY SERVICES	User Cabinet (Optional)	LV cabinet in the skid			
	UPS System (Optional) ^[4]	3 kVA / 3 kW			
OTHER EQUIPMENT	Safety mechanism (Optional)	Interlocking system			
	Fire suppression system (Optional)	Accessory for transformer oil retention tank			
STANDARDS	Compliance	IEC 62271-212, IEC 62271-200, IEC 60076, IEC 61439-1			

NOTES

- [1] Consult with Power Electronics for other options.
 [2] For lower temperatures, consult with Power Electronics.
 [3] SF6 free optional available.
 [4] Consult with Power Electronics for UPS autonomy.

Twin Skid Compact

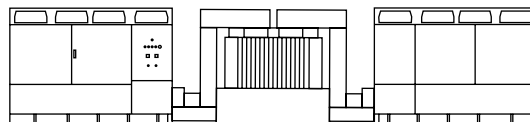

REFERENCES	MVT08780H100	MVT08780H080	MVT08780H050	MVT08780H040	MVT08780H031	
RATINGS	Rated power @ 40 °C		8780 kVA			
	Operating Grid Frequency				60 Hz	
MEDIUM VOLTAGE EQUIPMENT	MV rated voltage	20 kV	22 kV	30 kV	33 kV	34,5 kV
	LV rated voltage		690 V			
	Transformer cooling		ONAN (KNAN optional)			
	Transformer vector group		Dy11y11			
	Transformer protection		Protection relay for pressure, temperature (two levels) and gassing / dielectric level			
			PT100			
	Transformer index of protection		IP54			
	Transformer losses		IEC standard (IEC Tier-2 optional)			
	Oil retention tank (Optional)		Galvanized steel. Integrated with hydrocarbon filter.			
	Switchgear configuration ^[3]		Double feeder (2L)			
	Switchgear protection ^[3]		Circuit breaker (V)			
	Switchgear short circuit rating ^[1]		16 kA / 1 s (optionally: 20 kA / 1 s, 20 kA / 3 s or 25 kA / 1 s)			
	Switchgear IAC ^[1]		A-FLR 16 kA / 1 s (optionally 20 kA or 25 kA)			
	Rated impulse withstand voltage		125 kV	170 kV		
CONNECTIONS	MV connections		Close-coupled plug & play solution			
	MV AC wiring		MV bridge between transformer and protection switchgear prewired			
ENVIRONMENT	Ambient temperature range ^[2]		From -25 °C to +60 °C, >40 °C power derating			
	Maximum altitude (above sea level) ^[1]		Up to 1000 m (optionally up to 4000 m)			
	Relative humidity		4% to 95%			
AUXILIARY SERVICES	User Cabinet (Optional)		LV cabinet in the skid			
	UPS System (Optional) ^[4]		3 kVA / 3 kW			
OTHER EQUIPMENT	Safety mechanism (Optional)		Interlocking system			
	Fire suppression system (Optional)		Accessory for transformer oil retention tank			
STANDARDS	Compliance		IEC 62271-212, IEC 62271-200, IEC 60076, IEC 61439-1			

NOTES

- [1] Consult with Power Electronics for other options.
 [2] For lower temperatures, consult with Power Electronics.
 [3] SF6 free optional available.
 [4] Consult with Power Electronics for UPS autonomy.